



AC-DC BATTERY CHARGER

- ▶ 120~326W *Portable Battery Charger*
- ▶ 300~1000W *Stationary Battery Charger*

DC-AC POWER INVERTER

- ▶ 500W *Stand-alone Solar Inverter*
- ▶ 100~2500W *Modified Sine Wave*
- ▶ 200~3000W *True Sine Wave*
- ▶ 1500~3000W *True Sine Wave with Solar Charger*



Total Solution For

Power Inverter & Battery Charger

About MEAN WELL

Established in 1982, MEAN WELL is a leading manufacturer of standard switching power supplies. In response to the world's energy-saving trend, we've come up with a green power solution that include DC/AC inverters, solar inverters, and battery chargers to fulfill the alternative energy requirements in the market. Those products are highly efficient, save energy, low power consumption and approved by global safety/EMC certificates per TUV, UL, and CE, which greatly guarantee your safety for all-purpose solar power applications and any charging system, such as electric scooter, electric bicycle, electric wheelchair... etc.

Backed by 31 years' experience, we have over 5,000 products that allow us to provide "one stop shopping" to our customers. Every product in the MEAN WELL range is the result of rigid procedures governing design, design verification test (DVT), design quality test (DQT), component selection, pilot-run production, and mass production. With our network of over 200 distributors in over 70 countries globally, your order can be delivered within 24 hours. No minimum order required. To source from a trusted industry supplier, contact us today!

Index

- 1 **GC/PB Series** 120~326W Portable Battery Charger
- 2 **PB Series** 300~1000W Stationary Battery Charger
ISI Series 500W Stand-alone Solar Inverter (Built-in MPPT Charger)
- 3 **A301/302 Series** 100~2500W Modified Sine Wave Inverter
- 4-5 **TS Series** 200~3000W True Sine Wave Inverter
- 6 **TN Series** 1500~3000W True Sine Wave Inverter with Solar Charger
- 7 Setting Procedure via Front Panel for TN/TS-1500/3000 Series
- 8 Comparison of UPS and Energy Saving Mode for TN Series
- 9 Applications



120~326W Portable Battery Charger


Please refer to www.meanwell.com for detail spec.

Features

- Universal AC input / Full range
- AC input range selectable by switch (PB-120)
- No load power consumption < 0.5W (GC120)
- No load power consumption < 1W (GC160/220/330)
- High efficiency up to 94%
- Built-in active PFC function, PF > 0.9 (GC series)
- Built-in passive PFC function (PB-120)
- Fully enclosed plastic case (GC series)
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Fanless design, cooling by free air convection (GC series)

- Cooling by built-in DC fan (PB-120/230)
- Built-in ON/OFF power switch (PB-120/230)
- Built-in remote ON/OFF control (PB-230)
- Protections:
Short circuit / Over voltage / Over temp. / Reverse polarity (PB-120/230)
- LED indicator for charging status
- Especially suitable for portable usage
- Charger for Lead-Acid, Li-Ion, Gel cell batteries
- 2 years warranty



Model Name	GC120	GC160	GC220	GC330	P  -120 =A: pulse charge B: 2 section voltage charge	PB-230
AC input voltage range	85~264VAC		90~264VAC		88~132VAC / 176~264VAC selectable by switch	90~264VAC
Charge style	2 stage				3 stage	
Over voltage protection	105%~135%, shut off O/P voltage, re-power on to recover				108%~127%, shut off output voltage, re-power on to recover (PB-230: 102%~125%)	
Withstand voltage	I/P-O/P: 3kVAC, 1 minute					
Working temperature	-30~+70℃		-30~60℃		-10~+45℃	-20~+50℃
Safety standards	GC120~220: UL1012 (AD1-Type only), EN60950-1 GC330: UL60950-1, EN60950-1				UL60950-1, TUV EN60950-1, EN60335-2-29 (except for 55.2V)	UL1012 (AD1-Type only), TUV EN60950-1
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3, FCC part15 class B				EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3	
Standard DC output plug (Male, power supply side)	Power DIN 4P with lock type, Kycon K PPX-4P		4P/AMP1-480702-0 equivalent		MIC 3P	MIC 4P

120W

Model Name	Wattage	Output	Effi.
GC120A12- <input type="checkbox"/>	102W	13.6V, 7.50A	86.5%
GC120A24- <input type="checkbox"/>	120W	27.2V, 4.42A	90.0%
GC120A48- <input type="checkbox"/>	120W	54.4V, 2.21A	91.0%

GE R7B, AD1

160W

Model Name	Wattage	Output	Effi.
GC160A12- <input type="checkbox"/>	136W	13.6V, 10.0A	89.0%
GC160A24- <input type="checkbox"/>	160W	27.2V, 5.89A	92.5%
GC160A48- <input type="checkbox"/>	160W	54.4V, 2.95A	94.0%

GE R7B, AD1

210W

Model Name	Wattage	Output	Effi.
GC220A12- <input type="checkbox"/>	184W	13.6V, 13.5A	89.0%
GC220A24- <input type="checkbox"/>	218W	27.2V, 8A	92.5%
GC220A48- <input type="checkbox"/>	218W	54.4V, 4A	93.0%

GE R7B, AD1

326W

Model Name	Wattage	Output	Effi.
GC330A36-C4P	326W	40.8V, 8A	93.5%
GC330A48-C4P	326W	54.4V, 6A	93.5%

120W

Model Name	Wattage	Output	Effi.
PB-120-13- <input type="checkbox"/>	99W	13.8V, 0~7.2A	73.0%
PB-120-27- <input type="checkbox"/>	119W	27.6V, 0~4.3A	79.0%
PB-120-54- <input type="checkbox"/>	121W	55.2V, 0~2.2A	79.0%

230W

Model Name	Wattage	Output	Effi.
PB-230-12- <input type="checkbox"/>	230W	14.4V, 0~16A	81.5%
PB-230-24- <input type="checkbox"/>	230W	28.8V, 0~8A	85.5%
PB-230-48- <input type="checkbox"/>	230W	57.6V, 0~4A	86.0%

☐ Blank, AD1; ☐ Blank: Power DIN 4P, AD1: Anderson Connector

Model Name	Output Connector	Safety
GC120A- <input type="checkbox"/> R7B GC160A- <input type="checkbox"/> R7B GC220A- <input type="checkbox"/> R7B PB-230- <input type="checkbox"/> AD1	Power DIN 4P	CB FCC CE (GC series only)
GC120A- <input type="checkbox"/> AD1 GC160A- <input type="checkbox"/> AD1 GC220A- <input type="checkbox"/> AD1 PB-230- <input type="checkbox"/> AD1	Anderson Connector	UL CB FCC CE (GC series only)
GC330A- <input type="checkbox"/> C4P	AMP Connector	UL CB FCC CE

- UL1012 listed only for "Anderson Connector"
- ☐ = 12,24,48; R7B: Power DIN 4P, AD1: Anderson Connector
- ☐ = 36,48; C4P: AMP 1-480702-0 equivalent



300~1000W Stationary Battery Charger

Please refer to www.meanwell.com for detail spec.


Features

- Universal AC input / Full range (PB-600/1000)
- AC input range selectable by switch (PB-300/360)
- Built-in passive PFC function (PB-300P/360P)
- Built-in active PFC function (PB-600/1000)
- 3 poles AC inlet IEC320-C14
- Cooling by built-in DC fan (except for PB-300)
- Built-in ON/OFF power switch

- Built-in remote ON/OFF control
- 2/3/8 stage smart charger for PB-600/1000
- Protections:
Short circuit / Over voltage / Over temperature / Reverse polarity
- LED indicator for charging status
- 3 years warranty



(PB-600/1000) (12/24V only)



▲PB-300 253x 135x 48.5 mm



▲PB-360 253x 135x 48.5 mm



▲PB-600 230x 158x 67 mm



▲PB-1000 300x 184x 70 mm

Model Name	PB-300	PB-360	PB-600	PB-1000
AC input voltage range	90~132VAC / 180~264VAC selectable by switch		90~264VAC	
Charge style	3 stage		2/3/8 stage (selectable)	
Over voltage protection	Range 108%~125%		112%~125%	110%~125%
Withstand voltage	Type shut off output voltage, re-power on to recover			
Working temperature	-10~+50 °C			
Safety standards	PB-300/360: UL60950-1, CB IEC60335-2-29 (except for 48V) PB-600: UL1012, TUV EN60950-1 (48V only), TUV EN60335-2-29 (except for 48V) PB-1000: UL60950-1, TUV EN60950-1			
EMC standards	EN55022 class B, EN61000-4-2,3,4,5,6,8,11, EN61000-3-2,3 (except for PB-300N/360N)			
DC output connector	Terminal block 2P			Terminal block 3P

300W

Model Name	Wattage	Output	Effi.
PB-300-12	300W	14.4V, 0~20.85A	85%
PB-300-24	302W	28.8V, 0~10.5A	86%
PB-300-48	305W	57.6V, 0~5.3A	88%
□ =P, N ; P: with PFC, N: non PFC			

360W

Model Name	Wattage	Output	Effi.
PB-360-12	350W	14.4V, 0~24.3A	85%
PB-360-24	360W	28.8V, 0~12.5A	86%
PB-360-48	360W	57.6V, 0~6.25A	87%
□ =P, N ; P: with PFC, N: non PFC			

600W

Model Name	Wattage	Output	Effi.
PB-600-12	576W	14.4V, 0~40.0A	86%
PB-600-24	605W	28.8V, 0~21.0A	87%
PB-600-48	605W	57.6V, 0~10.5A	89%

1000W

Model Name	Wattage	Output	Effi.
PB-1000-12	864W	14.4V, 0~60.0A	85%
PB-1000-24	999W	28.8V, 0~34.7A	88%
PB-1000-48	1002W	57.6V, 0~17.4A	89%

500W DC/AC Off-Grid Solar Inverter



Please refer to www.meanwell.com for detail spec.

Features

- True sine wave output (THD<3%)
- Built-in 500W MPPT solar charger, MPPT efficiency: 98% (Peak)
- High surge power up to 1000W
- Output voltage / Frequency adjustable
- High efficiency up to 88%
- Front panel indicator for operation status
- Protections:
Input: Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage
Output: Short circuit / Overload / Over temperature
- 3 years warranty



205x 158x 67 mm



FCC/CE pending

Output power	500W (rated power); 1000W (surge power)
DC input rated voltage	12VDC, 24VDC or 48VDC
AC output voltage	100/110/115/120VAC; 200/220/230/240VAC adjustable via setting button on front panel
Output frequency	50Hz/60Hz adjustable via setting button on front panel
AC output waveform	True sine wave, THD<3.0%
AC output regulation	±3% of rated output voltage
No load dissipation (Typ.)	≤15W
Working temperature	-20~+60 °C (refer to output derating curve)
Solar Panel	Input voltage range 25~50V, 35~90V or 70~160V
Max. short circuit current	11A (4.5A for 48VDC input)
Rated charger power	500W
Safety standards	EN60950-1 (LVD)
EMC standards	FCC part 15 class B, EN55022 class B, EN61000-4-2,3,8

Model Name	Continue Power	Input VDC	Output VAC/Hz	Output socket	Effi.
ISI-501-112	450W	10.5~15	110/60	TYPE-A	85%
ISI-501-124	500W	21~30	110/60	TYPE-A	85%
ISI-501-148	500W	42~60	110/60	TYPE-A	85%
ISI-501-212	450W	10.5~15	230/50	TYPE-B	85%
ISI-501-224	500W	21~30	230/50	TYPE-B	85%
ISI-501-248	500W	42~60	230/50	TYPE-B	85%
□ = A, B (standard model), C, D, E, F, U (optional model)					
Please refer to Page 4 for AC output receptacle list					


100~2500W Modified Sine Wave



Please refer to www.meanwell.com for detail spec.

Features

- High frequency design
- Input protections:
 - Reverse polarity / Over and under voltage / Battery low alarm and shutdown
- Output protections: Short circuit / Overload / Over temp.
- With power ON/OFF switch and LED indicator
- Built-in remote ON/OFF control for 1000~2500W (optional)
- Built-in USB interface and without fan for 100W
- Input and output fully isolation
- Low power consumption (standby)
- LVD meet EN60950-1 and e13 mark
- EMC meet EN61000-4-2,3, EN55022
- 1 year warranty



AC Output Receptacle (optional) for A301/A302 Series



TYPE-1 JAPAN TYPE-2 USA TYPE-3 EUROPE TYPE-4 UNIVERSAL TYPE-5 AUSTRALIA TYPE-6 U.K.

Please consult MeanWell for other kinds of optional socket.
TYPE-2,3 (standard model) ; TYPE-1,4,5,6 (optional model)

▲100W (Built-in USB)
170mmx 65ø



▲150W / 110V 122x 73x 45 mm



▲600W 210x 173x 65 mm



▲1500W 455x 210x 85 mm



▲150W / 230V
165x 94x 69 mm

▲300W 165x 88x 74 mm

▲1000W 320x 210x 85 mm

▲2500W 430x 210x 159 mm

Model Name	A301	A302
DC input rated voltage	12.5VDC	25.0VDC
AC output voltage / Frequency	110VAC(rms) / 60Hz or 230VAC(rms) / 50Hz	
Max. output power	100W, 150W, 300W, 600W, 1000W, 1500W, 2500W	
USB output power	5VDC / 500mA (100W only)	
AC output regulation	±10% of rated output voltage	
Bat. low alarm	10±0.5VDC	20.5±1.0VDC
Bat. low shut down	9.5±0.5VDC	19.5±1.0VDC
I/P over voltage protection	15~17VDC	30~32VDC
Working temperature	0~+40°C (0~+25°C for 2500W)	
Safety standards	Compliance to EN60950-1(LVD)	
EMC standards	Compliance to EN55022 class B, e-mark, EN61000-4-2,3	

100W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-100-F3	100W	10-15	230/50	TYPE-3	90%
A302-100-F3	100W	21-30	230/50	TYPE-3	90%

150W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-150-B2	150W	10-15	110/60	TYPE-2	78%
A301-150-F3	150W	10-15	230/50	TYPE-3	78%
A302-150-B2	150W	21-30	110/60	TYPE-2	82%
A302-150-F3	150W	21-30	230/50	TYPE-3	82%

300W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-300-B2	300W	10-15	110/60	TYPE-2	82%
A301-300-F3	300W	10-15	230/50	TYPE-3	82%
A302-300-B2	300W	21-30	110/60	TYPE-2	85%
A302-300-F3	300W	21-30	230/50	TYPE-3	85%

600W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-600-B2	600W	10-15	110/60	TYPE-2	82%
A301-600-F3	600W	10-15	230/50	TYPE-3	82%
A302-600-B2	600W	21-30	110/60	TYPE-2	85%
A302-600-F3	600W	21-30	230/50	TYPE-3	85%

1000W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-1K0-B2	1000W	10-15	110/60	TYPE-2	82%
A301-1K0-F3	1000W	10-15	230/50	TYPE-3	82%
A302-1K0-B2	1000W	21-30	110/60	TYPE-2	85%
A302-1K0-F3	1000W	21-30	230/50	TYPE-3	85%

1500W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-1K7-B2	1500W	10-15	110/60	TYPE-2	82%
A301-1K7-F3	1500W	10-15	230/50	TYPE-3	82%
A302-1K7-B2	1500W	21-30	110/60	TYPE-2	85%
A302-1K7-F3	1500W	21-30	230/50	TYPE-3	85%

2500W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
A301-2K5-B4	2500W	10-15	110/60	TYPE-2	82%
A301-2K5-F3	2500W	10-15	230/50	TYPE-3	82%
A302-2K5-B4	2500W	21-30	110/60	TYPE-2	85%
A302-2K5-F3	2500W	21-30	230/50	TYPE-3	85%

200~700W True Sine Wave

Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- Output voltage / frequency adjustable
- High efficiency up to 91%
- Conformal coating for TS-700
- Standby saving mode to conserve energy (TS-700)
- Built-in fan ON/OFF control function (TS-400/700)
- Fanless design, cooling by free air convection (TS-200)
- Front panel indicator for load / battery / operation status

- High frequency design

- Input protections:

Bat. low alarm / Bat. low shutdown /
Reverse polarity / Over voltage

- Output protections:


Short circuit / Overload / Over temperature

- Applications:

Home appliance, power tools, office and portable equipment,
vehicle and yacht...etc.

- 3 years warranty

THREE-YEARS
WARRANTY



Please refer to www.meanwell.com for detail spec.

TS-200



TS-400



TS-700



Rated output power	200W	400W	700W
Maximum output power	230W for 3 minutes; 300W for 10 sec.	460W for 3 minutes; 600W for 10 sec.	800W for 3 minutes; 1050W for 10 sec.
Output surge rating (30 cycles)	400W	800W	1400W
DC input rated voltage	12VDC, 24VDC or 48VDC		
AC output voltage	100 / 110 / 115 / 120VAC; 200 / 220 / 230 / 240VAC adjustable via setting button on front panel		
Output frequency	50Hz / 60Hz adjustable via setting button on front panel		
AC output waveform	True sine wave, THD<3.0%		
AC output regulation (Typ.)	±3% of rated output voltage		
No load dissipation (Typ.)	≤15W		≤6W@standby saving mode
Working temperature	-10~+60°C		0~+60°C
Safety standards	110V	Design refer to UL458	
	230V	Compliance to EN60950-1(LVD)	
EMC standards	110V	Compliance to FCC part 15 class A	
	230V	Compliance to EN55022 class A, E-Mark, EN61000-4-2,3,8	

200W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
TS-200-112 A	200W	10.5-15	110 / 60	TYPE-A	86.0%
TS-200-121 A	200W	21.0-30	110 / 60	TYPE-A	87.5%
TS-200-143 A	200W	42.0-60	110 / 60	TYPE-A	88.0%
TS-200-212 B	200W	10.5-15	230 / 50	TYPE-B	86.0%
TS-200-221 B	200W	21.0-30	230 / 50	TYPE-B	87.5%
TS-200-243 B	200W	42.0-60	230 / 50	TYPE-B	88.0%

400W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
TS-400-112 A	400W	10.5-15	110 / 60	TYPE-A	84.5%
TS-400-121 A	400W	21.0-30	110 / 60	TYPE-A	86.0%
TS-400-143 A	400W	42.0-60	110 / 60	TYPE-A	87.0%
TS-400-212 B	400W	10.5-15	230 / 50	TYPE-B	86.0%
TS-400-221 B	400W	21.0-30	230 / 50	TYPE-B	87.5%
TS-400-243 B	400W	42.0-60	230 / 50	TYPE-B	88.5%

700W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
TS-700-112 A	700W	10.5-15	110 / 60	TYPE-A	86%
TS-700-121 A	700W	21.0-30	110 / 60	TYPE-A	88%
TS-700-143 A	700W	42.0-60	110 / 60	TYPE-A	89%
TS-700-212 B	700W	10.5-15	230 / 50	TYPE-B	89%
TS-700-221 B	700W	21.0-30	230 / 50	TYPE-B	90%
TS-700-243 B	700W	42.0-60	230 / 50	TYPE-B	91%

□ = A, B (standard model), C, D, E, F (optional model)

AC Output Receptacle List

TYPE-A	TYPE-B	TYPE-C	TYPE-D
USA	Europe	Australia	U.K.
TYPE-E	TYPE-F	TYPE-G	TYPE-U
Japan	GFCI	(Terminal only)	Universal

Please consult MEAN WELL for other kinds of optional output socket.

1000~3000W True Sine Wave

Please refer to www.meanwell.com for detail spec.

Features

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- High efficiency up to 92%
- Conformal coating
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Front panel indicator for load / battery / operation status

- High frequency design
- Input protections:
Bat. low alarm / Bat. low shutdown / Reverse polarity / Over-voltage
- Output protections:
Short circuit / Overload / Over temperature
- Applications:
Home appliance, power tools, office and portable equipment, vehicle and yacht...etc.
- 3 years warranty




TS-1000



345x 184x 70 mm

TS-1500



420x 220x 88 mm

TS-3000



466.8x 283.5x 100 mm

Rated output power	1000W	1500W	3000W
Maximum output power	1150W for 3 minutes; 1500W for 10 sec.	1725W for 3 minutes ; 2250W for 10 sec.	3450W for 3 minutes ; 4500W for 10 sec.
Output surge rating (30 cycles)	2000W	3000W	6000W
DC input rated voltage	12VDC, 24VDC or 48VDC		
AC output voltage	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VAC adjustable via setting button on front panel		
Output frequency	50Hz/60Hz adjustable via setting button on front panel		
AC output waveform	True sine wave, THD<3.0%		
AC output regulation (Typ.)	±3% of rated output voltage		
No load dissipation (Typ.)	≤ 6W @ standby saving mode	≤ 18W @ standby saving mode	≤ 10W @ standby saving mode
Working temperature	0~+60°C		
Safety standards	110V	UL458 approved (except for 48V and only for GFCI receptacle)	UL458 approved for TYPE-G
	230V	Compliance to EN60950-1 (LVD)	
EMC standards	110V	Compliance to FCC part 15 class A	
	230V	Compliance to EN55022 class A (class B for TS-1500), E-Mark, EN61000-4-2,3,8	

1000W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
TS-1000-112 A	1000W	10.5-15	110/60	TYPE-A	88%
TS-1000-124 A	1000W	21.0-30	110/60	TYPE-A	89%
TS-1000-148 A	1000W	42.0-60	110/60	TYPE-A	90%
TS-1000-212 B	1000W	10.5-15	230/50	TYPE-B	90%
TS-1000-224 B	1000W	21.0-30	230/50	TYPE-B	91%
TS-1000-248 B	1000W	42.0-60	230/50	TYPE-B	92%

1500W

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
TS-1500-112 A	1500W	10.5-15	110/60	TYPE-A	87%
TS-1500-124 A	1500W	21.0-30	110/60	TYPE-A	89%
TS-1500-148 A	1500W	42.0-60	110/60	TYPE-A	89%
TS-1500-212 B	1500W	10.5-15	230/50	TYPE-B	88%
TS-1500-224 B	1500W	21.0-30	230/50	TYPE-B	90%
TS-1500-248 B	1500W	42.0-60	230/50	TYPE-B	91%

Model Name	Continue power	Input VDC	Output VAC/Hz	Output socket	Effi.
TS-3000-112 A	3000W	10.5-15	110/60	TYPE-A	88%
TS-3000-124 A	3000W	21.0-30	110/60	TYPE-A	90%
TS-3000-148 A	3000W	42.0-60	110/60	TYPE-A	91%
TS-3000-212 B	3000W	10.5-15	230/50	TYPE-B	89%
TS-3000-224 B	3000W	21.0-30	230/50	TYPE-B	91%
TS-3000-248 B	3000W	42.0-60	230/50	TYPE-B	92%

□ = A, B (standard model), C, D, E, F (optional model), G (optional model for TS-3000 only)

► Please refer to page 4 for AC output receptacle list.

► Inverter Remote Controller


IRC series is the monitoring and control unit used for the inverter series. It can decode the RS-232 signal sent by inverter series and display through digital meters.



75x 55x 21mm

Features:

- Wall-mounted and control panel assembly acceptable
- Built-in ON/OFF button
- LED indicators for remote ON/OFF, abnormal and power saving mode
- Equipped with 10FT cable, optional for 25FT or 50FT
- Connect directly to the remote socket of inverter; no power supply needed
- Suitable series:
IRC1: TS-700 / 1000 / 1500 / 3000
TN-1500 / 3000
IRC2: TS-700 / 1000 / 1500 / 3000
IRC3: TN-1500 / 3000
- 3 years warranty

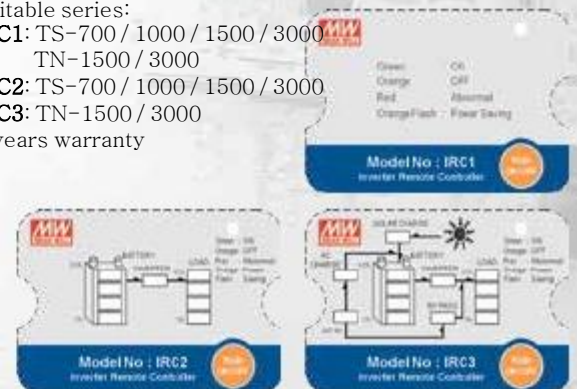



1500~3000W

True Sine Wave with Solar Charger



Features

Please refer to www.meanwell.com for detail spec.

- True sine wave output (THD<3%)
- 2 times high surge power for motor related application
- Advanced digital control by microprocessor
- High frequency design; high efficiency up to 92%
- Conformal coating
- Standby saving mode to conserve energy
- Built-in fan ON/OFF control function
- Output voltage / frequency adjustable
- Input protections: Bat. low alarm / Bat. low shutdown / Reverse polarity / Over voltage

- Solar input current up to 30A max.
- Output protections: Short circuit / Overload / Over temperature / AC circuit breaker
- Front panel indicator for load / battery / operation status
- Selectable UPS & energy saving mode
- AC by pass / Built-in AC and solar charger
- Fast transfer time under 10ms (Inverter mode \rightleftharpoons Bypass mode)
- Optional monitoring software and connection cable (MW order No.: DS-TN-1500 for TN-1500/3000)




TN-1500



420x 220x 88 mm


TN-3000

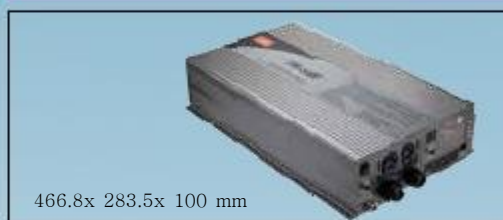

466.8x 283.5x 100 mm

Rated output power	1500W	3000W
Maximum output power	1725W for 3 minutes ; 2250W for 10 seconds	3450W for 3 minutes ; 4500W for 10 seconds
Output surge rating (30 cycles)	3000W	6000W
DC input rated voltage	12VDC, 24VDC or 48VDC	
AC output voltage	100 / 110 / 115 / 120VAC or 200 / 220 / 230 / 240VA C adjustable via front panel or monitoring software	
AC output regulation (Typ.)	±3% of rated output voltage	
No load dissipation (Typ.)	≤18W @ standby saving mode	≤10W @ standby saving mode
Output frequency	50Hz/60Hz adjustable via front panel or monitoring software	
AC output waveform	True sine wave, THD<3.0%	
Transfer time (Typ.)	10ms; inverter mode \rightleftharpoons Bypass mode	
Working temperature	0~+60°C	
Safety standards	110V	UL458 approved(except for 48V and only for GFCI receptacle)
	230V	UL458 approved for TYPE-G
EMC standards	110V	Compliance to EN60950-1 (LVD)
	230V	Compliance to FCC part 15 class A
		Compliance to EN55022 class A (class B for TN-1500), E-Mark, EN61000-4-2,3,4,5,6,8,11

Solar Inverter Block Diagram (Inverter with AC & Solar Charger) – TN Series

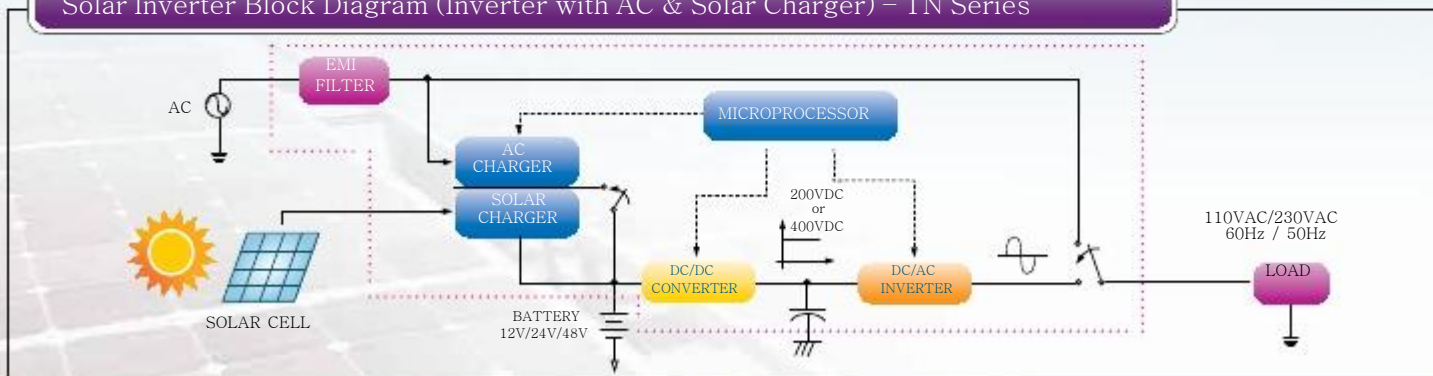

1500W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-1500-12A	1500W	10.5-15	110 / 60	TYPE-A	87%
TN-1500-12A	1500W	21.0-30	110 / 60	TYPE-A	89%
TN-1500-12A	1500W	42.0-60	110 / 60	TYPE-A	89%
TN-1500-24B	1500W	10.5-15	230 / 50	TYPE-B	88%
TN-1500-24B	1500W	21.0-30	230 / 50	TYPE-B	90%
TN-1500-24B	1500W	42.0-60	230 / 50	TYPE-B	91%

3000W

Model Name	Continue power	Input VDC	Output VAC / Hz	Output socket	Effi.
TN-3000-12A	3000W	10.5-15	110 / 60	TYPE-A	88%
TN-3000-12A	3000W	21.0-30	110 / 60	TYPE-A	89%
TN-3000-12A	3000W	42.0-60	110 / 60	TYPE-A	89%
TN-3000-24B	3000W	10.5-15	230 / 50	TYPE-B	88%
TN-3000-24B	3000W	21.0-30	230 / 50	TYPE-B	90%
TN-3000-24B	3000W	42.0-60	230 / 50	TYPE-B	91%


A, B (standard model), C, D, E, F (optional model), G (optional model for TN-3000 only)

Please refer to page 4 for AC output receptacle list.

Setting Procedure via Front Panel

for TS/TN-1500/3000 Series

Front Panel

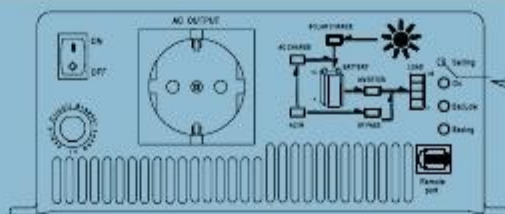

Use an insulated stick to press this setting button

Function

Setting Procedure

First Level

UPS and Energy Saving Mode Selection

- Step 1** The inverter should be turned off while resetting, input batteries should be connected. AC main can either be connected or disconnected, and the load should be removed.
- Step 2** Use an insulated stick to press the setting button and then turn on the power switch. After pressing for 5 seconds, the inverter will send out a "Beep" sound. User can release the button and go into the setting procedure.

- Step 3** Please refer to table below and check the LED status to see if the operating mode is the one you need. (Factory setting: UPS mode)

Mode	UPS Mode	Energy Saving Mode
LED Status		
On	●	●
Bat Low	○	○
Saving	★	★

● Light
○ Dark
★ Flashing

- Step 4** The LED will change state by pressing the setting button for 1 second and then release.

Second Level

Output Voltage and Frequency Adjustment

- Step 1** After selecting the operating mode, pressing the setting button for 3~5 seconds and the inverter will send out a "Beep" sound. The button can be released and you can go on to the second section of "voltage / frequency".
- Step 2** Please refer to table below and check the LED status to see if the output voltage / frequency is the one you need (Factory setting: 230VAC/50Hz or 110VAC / 60Hz)

Mode	100VAC (200VAC)	110VAC (220VAC)	115VAC (230VAC)	120VAC (240VAC)
LED Status				
50Hz				
On	●	●	●	●
Bat Low	○	○	○	○
Saving	○	○	○	○
60Hz				
On	★	★	★	★
Bat Low	○	○	○	○
Saving	○	○	○	○

● Light
○ Dark
★ Flashing

- Step 3** The LED will change state by pressing the setting button for 1 second and then release.



Third Level

Saving Mode Selection

- Step 1** After selecting the output voltage and frequency, press the setting button for 5 seconds and the inverter will send out a "Beep" sound. The button can be released and you can go into the setting section for "saving mode".
- Step 2** Please refer to table below and check the LED status. (Factory setting: saving mode OFF)

Mode	ON	OFF
LED Status		
On	★	★
Bat Low	★	★
Saving	●	○

● Light
○ Dark
★ Flashing

- Step 3** The LED will change state by pressing the setting button for 1 second and then release.

- Step 4** Press the setting button for 5 seconds and the inverter will send out a "Beep" sound, the button can be released and all the setting are finished. The inverter will automatically store all the setting and then start to operate.


Note: 1.Descriptions which are highlighted represent functions exclusive to the TN-1500/3000 series.

2.For setting procedure of other product series, please refer to <http://www.meanwell.com/product/inverter/inverter01.html>



Comparison of UPS and Energy Saving Mode

UPS and Energy Saving Block Diagram

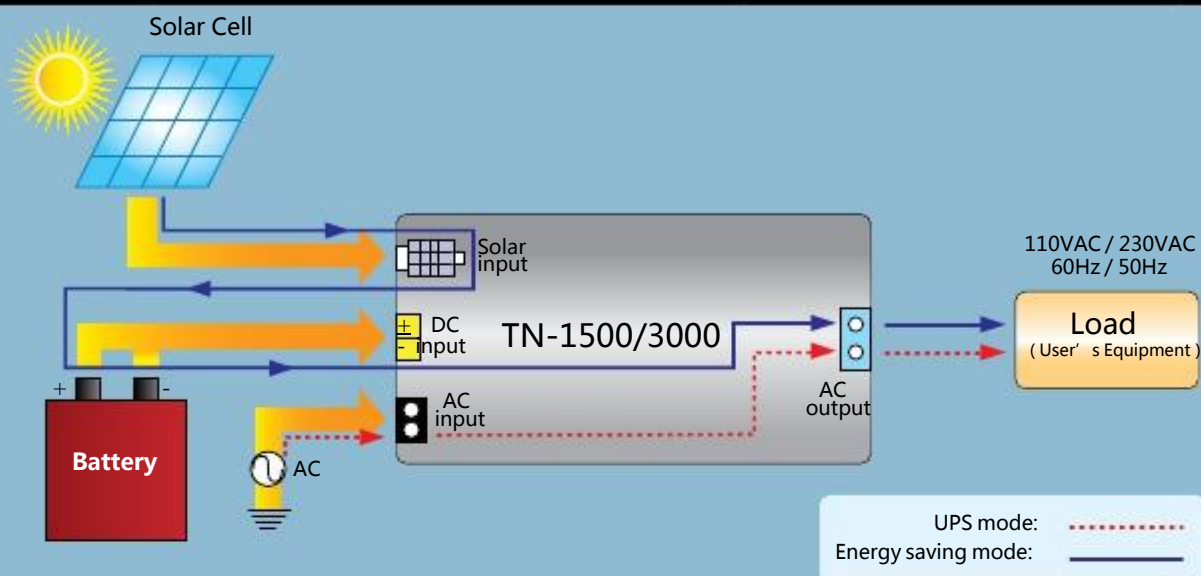

Operation Mode	Description & Special Feature	Possible Application
UPS mode	<p>Utility has the highest priority, the TN unit will operate as an UPS system.</p> <p>Utility $\xrightarrow{\text{bypass}}$ load (user's equipment)</p> <p>Utility $\xrightarrow{\text{back-up}}$ battery bank $\xrightarrow{\text{Inverter}}$ load (user's equipment)</p> <ul style="list-style-type: none"> Area with unstable utility Better performance as compared to conventional UPS (capable of withstanding heavy load) 	<ul style="list-style-type: none"> Office: computer system, security system, printer, scanner, fax...etc. Home: personal computer, refrigerator, lighting...etc. Telecom sub-station
Energy Saving mode	<p>Solar energy has the highest priority. Utility bill can be reduced since the TN unit acquires energy from the solar panel as higher priority.</p> <p>Solar panel \rightarrow battery bank \rightarrow inverter \rightarrow load (user's equipment)</p> <ul style="list-style-type: none"> With additional solar panel. It can be used as individual sub power station (Independent power station) Area without utility or unstable utility Cut cost on utility bill 	<ul style="list-style-type: none"> High altitude location or green building: weather station, lighting, hair dryer...etc. Yacht: TV, DVD, radio, air conditioner, coffee maker...etc. Vehicle: mobile phone charger, notebook, electronic pot...etc.

Notice

- **Modified sine wave inverter** is a stepped waveform that is designed to have characteristics similar to the sine wave shape of utility power. It is suitable for most household applications, such as notebook, PC, MP3 player, cell phone charger, and digital camera...etc. but may present certain compromises with some loads such as ham radio, microwave oven(with clock), laser printer, motor speed controller, transformer-less charger, and load with high surge demand (capacitance, fluorescent lamp...etc.).
- **True sine wave inverter** is suitable for most AC loads, including all electronic equipment of household, motor related application such as electronic drill, linear and switching power supply used in electronic equipment.

Applications




- 1 Solar Panel
- 2 Battery Bank
- 3 Off-Grid DC/AC Solar Inverter (TN Series)
- 4 AC Input (bypass)
- 5 AC Outlet

- 1 Utility Input (Shore)
- 2 AC/DC Battery Charger (PB series)
- 3 Battery Bank
- 4 Off-Grid AC/DC Power Inverter (TS series)
- 5 AC Outlet



Shore Power

- 1 AC/DC Battery Charger (PB series)
- 2 Battery Bank
- 3 Off-Grid DC/AC Inverter (TS series)
- 4 AC Outlet

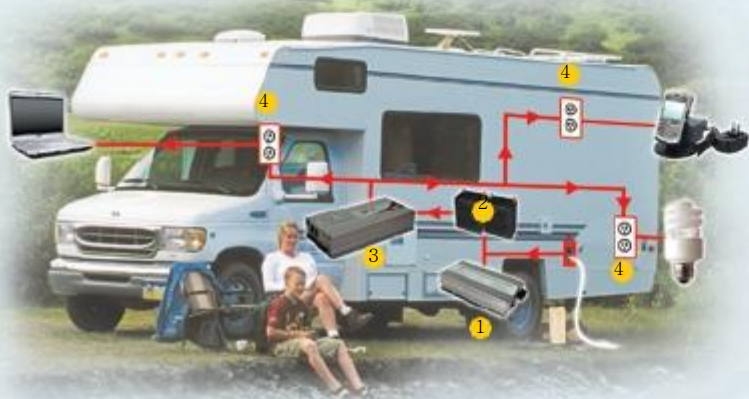

Applications:

TV, DVD, notebook, personal computer, lighting, refrigerator, fan, radio, hair dryer, electronic pot, coffee maker, and cell phone charger...etc.



前海瀛越(深圳前海瀛越科技有限公司)

(总部)地址：深圳市前海深港合作区前海一路1号A栋201室

邮编：518000

传真：0755-85240061

电话：0755-85240061

Q Q：63991076

微信：18822881553（手机微信同号）

网址：www.yingyuesz.com

邮件：info@yingyuesz.com（综合服务）

cc@yingyuesz.com（销售服务）

sz@yingyuesz.com（技术服务）

